

产品目录 · PRODUCT CATALOG

# 产品型号参数目录表

High Capacity · Reliable Power · Safe Performance

Lithium-ion Polymer Battery Cells  
for Portable & Consumer Electronic Devices

## Grade-A Cell

**28**

MODELS  
系列型号

**1000–  
10000**

mAh RANGE  
容量范围

**3.7V**

NOMINAL  
标称电压

**≥300**

CYCLE LIFE  
循环寿命

## CERTIFICATIONS · 认证资质



RoHS

CB



UN38.3



FC



[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



523450-1000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤60mΩ                                  |
| Dimensions          | 5.2mm x34mm x50mm                      |
| Weight              | 20g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 672 pcs                                |
| Box Weight          | 12.90kg                                |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



803040-1000mAh

Lithium Polymer Battery Cell


|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤70mΩ                                  |
| Dimensions          | 8.0mm x30mm x40mm                      |
| Weight              | 20g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 588 pcs                                |
| Box Weight          | 11.520kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



103040-1200mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1200mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤60mΩ                                  |
| Dimensions          | 10mm x30mm x40mm                       |
| Weight              | 24g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 462 pcs                                |
| Box Weight          | 11.180kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

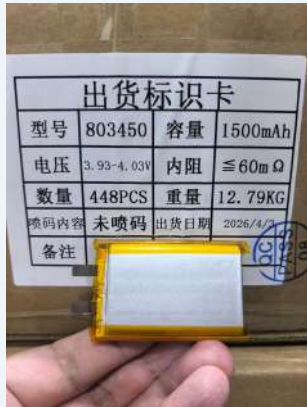

803040-1500mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1500mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤60mΩ                                  |
| Dimensions          | 8.0mm x34mm x50mm                      |
| Weight              | 29g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 448 pcs                                |
| Box Weight          | 12.79kg                                |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



### 454261-1500mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1500mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 4.5mm x42mm x61mm                      |
| Weight              | 28g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 460 pcs                                |
| Box Weight          | 12.63kg                                |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



### 103450-1800mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 1800mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 10mm x34mm x50mm                       |
| Weight              | 36g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 352 pcs                                |
| Box Weight          | 12.45 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



### 505060-2000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 2000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 5.0mm x50mm x60mm                      |
| Weight              | 35g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 396 pcs                                |
| Box Weight          | 13.71 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



### 104050-2500mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 2500mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 10mm x40mm x50mm                       |
| Weight              | 43g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 308 pcs                                |
| Box Weight          | 13.10 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139

**505573-2500mAh**

Lithium Polymer Battery Cell



|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 2500mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | $\leq 50m\Omega$                       |
| Dimensions          | 5.0mm x55mm x73mm                      |
| Weight              | 47g (approx.)                          |
| Cycle Life          | $\geq 300$ cycles                      |
| Quantity            | 330pcs                                 |
| Box Weight          | 15.32 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

**655063-3000mAh**

Lithium Polymer Battery Cell



|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 3000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | $\leq 50m\Omega$                       |
| Dimensions          | 6.5mm x50mm x63mm                      |
| Weight              | 48g (approx.)                          |
| Cycle Life          | $\geq 300$ cycles                      |
| Quantity            | 306pcs                                 |
| Box Weight          | 14.71 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

**755060-3000mAh**

Lithium Polymer Battery Cell



|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 3000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | $\leq 60m\Omega$                       |
| Dimensions          | 7.5mm x50mm x60mm                      |
| Weight              | 50g (approx.)                          |
| Cycle Life          | $\geq 300$ cycles                      |
| Quantity            | 270pcs                                 |
| Box Weight          | 13.53 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

**974058-3000mAh**

Lithium Polymer Battery Cell



|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 3000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | $\leq 50m\Omega$                       |
| Dimensions          | 9.7mm x40mm x58mm                      |
| Weight              | 48g (approx.)                          |
| Cycle Life          | $\geq 300$ cycles                      |
| Quantity            | 288pcs                                 |
| Box Weight          | 13.76kg                                |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



103665-3000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 3000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤60mΩ                                  |
| Dimensions          | 10mm x36mm x65mm                       |
| Weight              | 51g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 288pcs                                 |
| Box Weight          | 14.54kg                                |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



114065-4000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 4000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 11mm x40mm x65mm                       |
| Weight              | 66g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 200pcs                                 |
| Box Weight          | 13.02 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



955465-4000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 4000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 9.5mm x54mm x65mm                      |
| Weight              | 76g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 180pcs                                 |
| Box Weight          | 13.56 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



606090-4000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 4000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 6.0mm x60mm x90mm                      |
| Weight              | 76g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 216pcs                                 |
| Box Weight          | 16.32 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



115570-5000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 5000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 11mm x55mm x70mm                       |
| Weight              | 94g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 165pcs                                 |
| Box Weight          | 15.45 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



955465-5000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 5000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 9.5mm x54mm x65mm                      |
| Weight              | 78g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 180pcs                                 |
| Box Weight          | 13.95 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



124861-5000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.85V                                  |
| Nominal Capacity    | 5000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 12mm x48mm x61mm                       |
| Weight              | 76g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 180pcs                                 |
| Box Weight          | 13.69 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



656090-5000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 5000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤60mΩ                                  |
| Dimensions          | 6.5mm x60mm x90mm                      |
| Weight              | 81g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 204 pcs                                |
| Box Weight          | 16.46 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



6060100-5000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 5000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 6.0mm x60mm x100mm                     |
| Weight              | 85g (approx.)                          |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 216pcs                                 |
| Box Weight          | 18.21 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



906090-6000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 6000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 9.0mm x60mm x90mm                      |
| Weight              | 109g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 156pcs                                 |
| Box Weight          | 16.92 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



126090-8000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 8000mAh                                |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.5C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 12mm x60mm x90mm                       |
| Weight              | 145g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 120 pcs                                |
| Box Weight          | 17.38 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



1260110-9000mAh

Lithium Polymer Battery Cell

|                     |                                      |
|---------------------|--------------------------------------|
| Chemistry           | Lithium-ion                          |
| Nominal Voltage     | 3.7V                                 |
| Nominal Capacity    | 9000mAh                              |
| Charge Voltage      | 4.2V                                 |
| Cut-off Voltage     | 3.0V                                 |
| Charge Current      | 0.2C ~1.0C Max                       |
| Discharge Current   | 0.2C ~1.5C Max                       |
| Internal Resistance | ≤40mΩ                                |
| Dimensions          | 12mm x60mm x110mm                    |
| Weight              | 172g (approx.)                       |
| Cycle Life          | ≥300 cycles                          |
| Quantity            | 100 pcs                              |
| Box Weight          | 17.15 kg                             |
| Carton (L×W×H)      | 390*310*130 mm                       |
| Operating Temp      | Charge 0~45°C / -20~60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139



1260110-10000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 10000mAh                               |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.5C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 12mm x60mm x110mm                      |
| Weight              | 179g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 100pcs                                 |
| Box Weight          | 17.87 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



1160100-10000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.7V                                   |
| Nominal Capacity    | 10000mAh                               |
| Charge Voltage      | 4.2V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤50mΩ                                  |
| Dimensions          | 11mm x60mm x100mm                      |
| Weight              | 151g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 132pcs                                 |
| Box Weight          | 19.94 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



146074-10000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.85V                                  |
| Nominal Capacity    | 10000mAh                               |
| Charge Voltage      | 4.4V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.0C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 14mm x60mm x74mm                       |
| Weight              | 135g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 135pcs                                 |
| Box Weight          | 18.18 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+55°C / -20~+60°C (discharge) |



126280-10000mAh

Lithium Polymer Battery Cell

|                     |                                        |
|---------------------|----------------------------------------|
| Chemistry           | Lithium-ion                            |
| Nominal Voltage     | 3.85V                                  |
| Nominal Capacity    | 10000mAh                               |
| Charge Voltage      | 4.4V                                   |
| Cut-off Voltage     | 3.0V                                   |
| Charge Current      | 0.2C ~1.0C Max                         |
| Discharge Current   | 0.2C ~1.5C Max                         |
| Internal Resistance | ≤40mΩ                                  |
| Dimensions          | 12mm x62mm x80mm                       |
| Weight              | 137g (approx.)                         |
| Cycle Life          | ≥300 cycles                            |
| Quantity            | 120pcs                                 |
| Box Weight          | 16.36 kg                               |
| Carton (L×W×H)      | 390*310*130 mm                         |
| Operating Temp      | Charge 0~+60°C / -20~+60°C (discharge) |

High Capacity • Reliable Power • Safe Performance

Store in a cool, dry place and keep away from fire.

[www.lithioncell.com](http://www.lithioncell.com)

WhatsApp +8613928409139